

GP2661

PATENT



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: Edward P. Gancarcik; David Ross; Jean-Marc Seguin; Alain Chamsi

Serial No.: 10/056404 Art Unit: Unknown

Filed: January 25, 2002

Title: TRANSPORT PROTOCOLS FOR APPLICATION PLATFORMS OVER NETWORK PORTALS

Examiner: Not Yet Assigned

Docket No.: 481340010042

Commissioner for Patents
Washington, D.C. 20231

RECEIVED

MAR 15 2002

Technology Center 2600

Sir:

We now enclose a certified copy of United Kingdom Application Serial No. 0102138.5 filed on January 27, 2001 by Mitel Corporation, for "Transport Protocols for Application Platforms Over Network Portals."

Convention priority is claimed on the basis of this application.

Respectfully submitted,

I hereby certify that this correspondence is being deposited today with the United States Postal Service as first class mail in an envelope addressed to: Commissioner for Patents, Washington, D.C. 20231
on Feb 27, 2002

By: Barbara Karch

By:


David B. Cochran
David B. Cochran, Reg. No. 39,142
Jones, Day, Reavis & Pogue
North Point
901 Lakeside Avenue
Cleveland, Ohio 44114
(216) 586-3939

Attorney for Applicant

This Page Blank (uspto)



INVESTOR IN PEOPLE



RECEIVED

MAR 15 2002

Technology Center 2600

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

**CERTIFIED COPY OF
PRIORITY DOCUMENT**

Signed

Answer

Dated 31 January 2002

This Page Blank (uspto)

The Patent Office
THE PATENT OFFICE
A

27 JAN 2001

NEWPORT

1/77

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1. Your reference

RSN/ME/P11272GB
29 JAN 01 E601317-5 D00239
P01/7700 0.00-0102138.5

2. Patent application number

(The Patent Office will fill in this part)

0102138.5

27 JAN 2001

3. Full name, address and postcode of the or of each applicant (underline all surnames)

MITEL CORPORATION
350 LEGGET DRIVE,
PO BOX 13089,
KANATA,
ONTARIO K2K 2W7,
CANADA

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

ONTARIO, CANADA

607630006 TS

4. Title of the invention

TRANSPORT PROTOCOLS FOR
APPLICATION PLATFORMS OVER NETWORK
PORTALS

5. Name of your agent (if you have one)

CRUIKSHANK & FAIRWEATHER

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

19 ROYAL EXCHANGE SQUARE,
GLASGOW G1 3AE,
UNITED KINGDOM

Patents ADP number (if you know it)

547002

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country	Priority application number (if you know it)	Date of filing (day / month / year)
---------	---	--

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application	Date of filing (day / month / year)
-------------------------------	--

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

YES

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description	6
Claim(s)	3
Abstract	1
Drawing(s)	3 + 3

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*)

Request for substantive examination (*Patents Form 10/77*)

Any other documents
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Cruike & Fairweather

Date

CRUIKSHANK & FAIRWEATHER 26/01/01

12. Name and daytime telephone number of person to contact in the United Kingdom

Dr. R.S. Naismith
0141-221 5767

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

TRANSPORT PROTOCOLS FOR APPLICATION PLATFORMS OVER NETWORK PORTALS

Field of the Invention

5

The present invention relates in general to computer telephony integration (CTI) and more specifically to communications protocols for use by a mix of voice and data devices over a hybrid network.

Background of the Invention

10

Currently, telephony and data networks terminate with either a voice or data terminal, respectively. For example, the conventional terminal in the telephony paradigm is a telephone whereas in the data network paradigm the conventional terminal is a PC or laptop computer. Therefore, separate protocols have been developed for each network/termination pair. With the development of hybrid networks, standard inter-compatible protocols are required so that diverse voice and data devices can communicate efficiently with each other.

15

Summary of the Invention

20

According to the present invention, a communication protocol is provided whereby a diverse collection of voice and data devices may communicate with each other without complicated protocol conversions as exist in the prior art. More specifically, a protocol mechanism is provided for establishing communications between an application platform and a network portal, on the one hand, and between the network portal and a voice/data network, on the other hand. The protocol mechanism includes a physical layer which is common to the application platform and the network portal, on the one hand, and common to the network portal and the voice/data network, on the other hand. A data layer is provided which communicates between the physical layer and the associated application platform, network portal, or voice/data network. According to an important aspect of the invention, the data layer encapsulates the information to be communicated with header information for routing of the information.

25

30

Brief Description of the Detailed Drawings

A description of the prior art and of embodiments of the present invention will now be
5 described with reference to the accompanying drawings in which:

Figure 1 is a schematic representation of a voice/data hybrid infrastructure in
accordance with the prior art;

10 Figure 2 is a block diagram showing a protocol according to a first embodiment for
communications between an application platform and a network portal;

Figure 3 is a datagram showing the structure of a packet of information exchanged
between an application platform and network portal in accordance with the embodiment of
15 Figure 2;

Figure 4 is a block diagram showing a protocol according to a second embodiment for
communications between a network portal and a voice/data network; and

20 Figure 5 is a block diagram showing PDA-enabled sets in traditional and hybrid
networks configured for communication according to the protocol of the present invention.

Detailed Description of Preferred Embodiments

25 Figure 1 is a simplistic diagram of the hardware infrastructure for a voice/data hybrid
network. An application platform, or AP, represents any device that can send and receive
voice or data, or a mixture of both, between other AP devices through a network portal within
a voice/data network. In other words, an application platform (AP) is any device used as a
terminating device on the hybrid network. Examples of application platforms include
30 telephones, cellular phones, wireless communication devices, PDAs, computers, terminals,
laptops, etc. A network portal, or NP, is a device that acts as a common gateway to the
voice/data network for application platforms. Examples of network portals include any AP as
set forth above that is configured to act as a NP, wireless receivers/transmitters (base

stations), etc. The voice/data network itself is a system of voice or data (or a mixture of both) devices connected together for the purpose of transferring or routing voice/data information to other like devices. Examples of a voice/data network include a LAN, WAN, Internet, Intranet, PBX, Centrex, and Wireless Systems.

5

It is apparent from Figure 1 that two protocol blocks are required. One block defines communication between the application platform (AP) and the network portal (NP), and the second defines communication between the NP and the voice/data network.

10

Turning now to Figure 2, a high level representation is provided of the protocol blocks between the application platform and the network portal, in accordance with a first embodiment of the invention. The lowest layer, or physical layer, is common between both devices and is the mechanism by which information is passed. The physical layer can be a wired interface (serial, parallel, USB, POTS/telephony, etc...) or a wireless interface (infrared/IrDA, radio, cellular, etc...).

15

The next layer up, information encapsulation, performs two functions:

1. Takes information from the level above, packaging this information with a header containing necessary source/destination information and hands it over to the physical layer.
2. Takes information from the level below, removing the header containing necessary source/destination information and hands the information up to the higher level.

20

This level of abstraction allows for a more standard inter-compatible information exchange between devices than is provided for by the prior art.

25

The top layer is specific to the type of device it resides on. In the situation of an application platform device, the Application Specific Interface, or ASI, controls the formatting of information for use at the destination. The type of formatting is dependant on destination requirements (for example, voice information being passed from an Application Platform device for telephony (i.e. a POTS or IP telephone) is formatted for use by another telephony-compatible application platform device at the destination.

30

On the NP side of the diagram, a Network Portal Control Interface, or NPCI,

determines whether or not the information can be processed internally or whether the data should be repackaged for use somewhere within the voice/data network using the NP to VDN protocol. By having this layer, a NP device is able to process any information which is pertinent to itself rather than always re-transmitting and waiting for another device to return
5 it.

Figure 3 shows, in a simplified manner, how datagrams at the physical layer contain information targeted for voice or data networks. Voice or data information buried within the information encapsulation can travel over traditional telephony networks, or data networks
10 using IP, without concern for the content. Once the NPCI has received the datagram, it decides, based on the content of the Information Encapsulation region, whether it should handle the information itself or repackage the data for use at some other destination.

Figure 4 shows a high level view of the protocol blocks between the network portal
15 and the voice/data network. The lowest layer, physical layer, is common between both devices as this is the mechanism by which information is passed. As discussed above, the physical layer could be a wired or wireless interface.

The next layer up within the NP is the same as set forth above, namely information
20 encapsulation. If the NP does not handle the information itself it must repackage the data for transmission across the voice/data network.

The information routing layer of the VDN takes the information package passed from the NP, encapsulates the data and passes this packet through its already defined network
25 paths to the destination NP. From this point the process is reversed until an NP or IA handles the information.

The VDN that an NP communicates with can, for example, be another NP. Since the VDN is simply routing information, localized communications can eliminate the need for a
30 VDN in some circumstances. By extension, since a NP can also contain the protocol for an AP, such a device could then be connected as AP to NP to AP only, further simplifying connectivity.

To summarize, an AP device communicates to another AP device through the NP by means of two protocol blocks; each block handling a specific task in passing this information to the destination. What must be noted in the implementation of these protocols is that a device may contain the protocols to allow it to act as an application platform while at the same time containing the protocols to allow it to act as a network portal. By making the lower protocol layers simple and generic, any device can be designed to fill each or both of these roles.

Figure 5 shows implementation of the protocol according to the invention within a hardware infrastructure for PDA-enabled sets in a traditional telephone network as well as in an IP network.

Region A of Figure 5 shows a traditional telephony environment where the application platforms are shown as a PDA, a workstation, and a telephone. The telephone also acts as a network portal, for allowing the PC and PDA to communicate to the telephone itself as well as with other devices terminated elsewhere on the voice/data network. The PDA communicates in the preferred embodiment using infrared (IrDA) to the NP, which in turn can either handle the request or route it to the appropriate destination.

Region B of Figure 5 shows how the AP devices can be implemented within a voice/data network based on IP. Three different examples are given. In Example 1, a PDA communicates to other devices on the network, including computers, phones and application servers, through an infrared link to a NP (an IP-based telephone). In Example 2, the computer is connected using Ethernet cable directly to the IP-based telephone using the telephone as its own NP. In Example 3, a wireless implementation allows an infrared PDA to communicate through the NP (the wireless telephone) to another NP (the wireless base station) while at the same time, a wireless PDA can communicate directly to the wireless base station.

It will be appreciated that, although embodiments of the invention have been described and illustrated in detail, various changes and modifications may be made. Firstly, a Bluetooth implementation on the PDA enabled set may include a wireless transceiver to the PDA, IP phone and other devices on the wireless desktop. IP access for the PDA is implemented in a manner similar to the method described above except that the call control

command is imbedded in IP packets within the PDA & Bluetooth transceiver combination, instead of in the telephone set. The telephone set then acts as a network portal for all Bluetooth devices on the desktop. Another modification is that the PDA enabled telephone set may utilize the RS-232 communication protocol to support PDA applications such as Hot-Sync. Although this scenario is addressed by the Bluetooth wireless solution between the set and the PDA, the wired solution provides for faster development. All such changes and modifications may be made without departing from the sphere and scope of the invention as defined by the claims appended herein.

What is Claimed is:

1. A hybrid network configuration, comprising:

5 a plurality of application platforms for sending and receiving at least one of voice and data in accordance with a first predetermined protocol;

a voice/data network for routing said voice and data between said plurality of application platforms in accordance with a second predetermined protocol; and

10

at least one network portal for providing said plurality of application platforms access to said voice/data network using said first and second predetermined protocols.

2. The hybrid network configuration of claim 1, wherein said first protocol is
15 implemented within each of said plurality of application platforms by a physical layer for exchanging said voice and data between said plurality of application platforms and said at least one network portal, an application specific interface for formatting said voice and data for use by said application platforms, and a first information encapsulation layer for
20 appending source/destination headers to said voice and data received from said application specific interface and transmitting same over said physical layer and for stripping source/destination headers from said voice and data received from said physical layer and transmitting same to said application specific interface.

3. The hybrid network configuration of claim 2, wherein said first protocol is
25 implemented within said at least one network portal by said physical layer, a network portal control interface for identifying voice and data in connection with which said network portal is capable of processing directly and alternatively re-transmitting said voice and data, and a second information encapsulation layer for appending source/destination headers to said
30 voice and data received from said network portal control interface and transmitting same over said physical layer, and for stripping source/destination headers from said voice and data received from said physical layer and transmitting same to said network portal control interface.

4. The hybrid network configuration of claim 1, wherein said second protocol is implemented within said voice/data network by a physical layer for exchanging said voice and data between said voice/data network and said at least one network portal, an information routing layer for formatting said voice and data received from said physical layer for
5 transmission across said voice/data network and for appending source/destination headers to said voice and data and transmitting same over said physical layer.
5. The hybrid network configuration of claim 4, wherein said second protocol is implemented within said at least one network portal by said physical layer and an information
10 encapsulation layer for appending source/destination headers to said voice and data received from at least one of said plurality of application platforms and transmitting same over said physical layer, and for stripping source/destination headers from said voice and data received from said physical layer and transmitting same to said at least one of said plurality of application platforms.
15
6. The hybrid network according to any one of claims 1 to 5, wherein said plurality of application platforms comprise at least one of telephones, cellular phones, wireless communication devices, PDAs, personal computers, terminals, and laptop computers.
- 20 7. The hybrid network according to any one of claims 1 to 5, wherein said at least one network portal comprises at least one of telephones, cellular phones, wireless communication devices, PDAs, personal computers, terminals, wireless receiver/transmitter base stations, and laptop computers.
- 25 8. The hybrid network according to any one of claims 1 to 5, wherein said voice/data network comprises at least one of a LAN, WAN, Internet, Intranet, PBX, Centrex, and wireless system.
- 30 9. The hybrid network according to any one of claims 1 to 5, wherein said physical layer comprises at least one of a wired interface or wireless interface.
10. The hybrid network according to claim 9, wherein said wired interface comprises at least one of a serial interface, parallel interface, USB interface, tip and ring interface.

11. The hybrid network according to claim 9, wherein said wireless interface comprises at least one of an infrared/IrDA interface, radio interface, and cellular interface.

ABSTRACT

The present invention is directed at hybrid network configuration, comprising a plurality of application platforms for sending and receiving at least one of voice and data in accordance with a first predetermined protocol, a voice/data network for routing the voice and data between the plurality of application platforms in accordance with a second predetermined protocol, and at least one network portal for providing the plurality of application platforms access to the voice/data network using the first and second predetermined protocols.

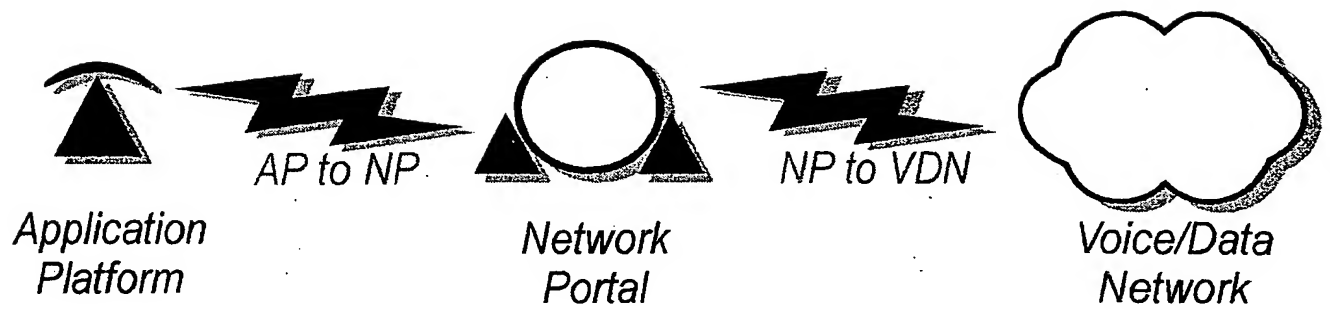


Figure 1

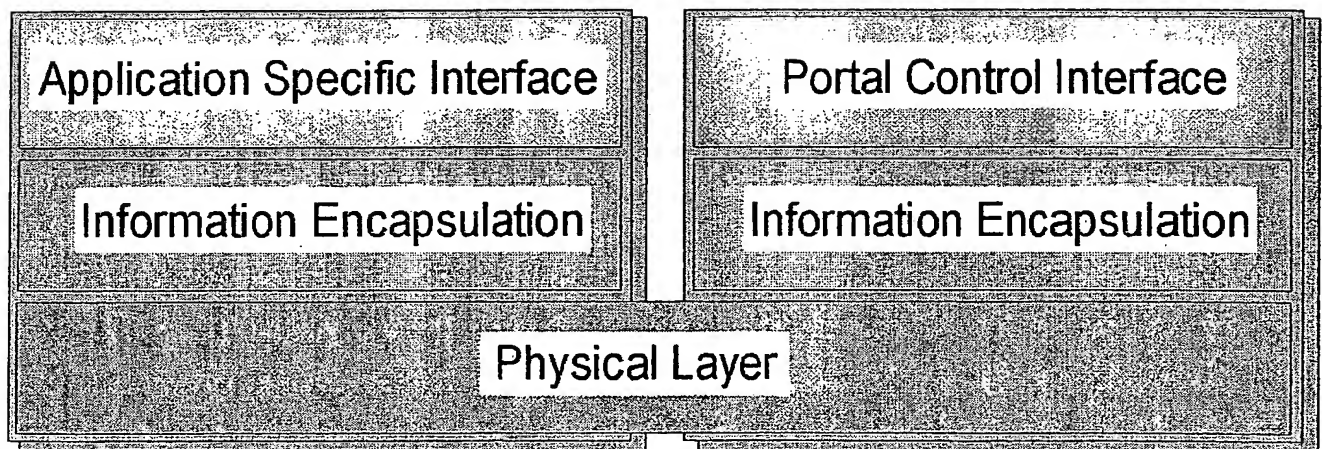
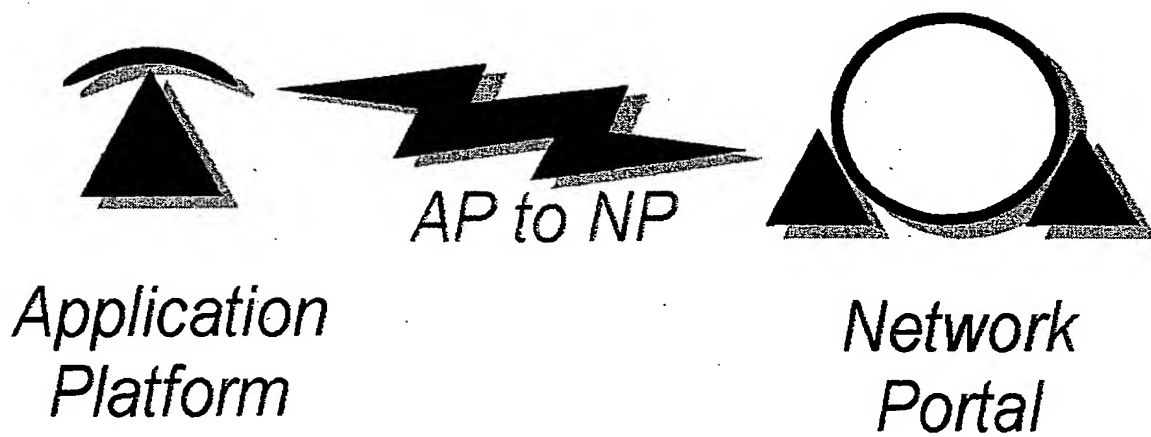
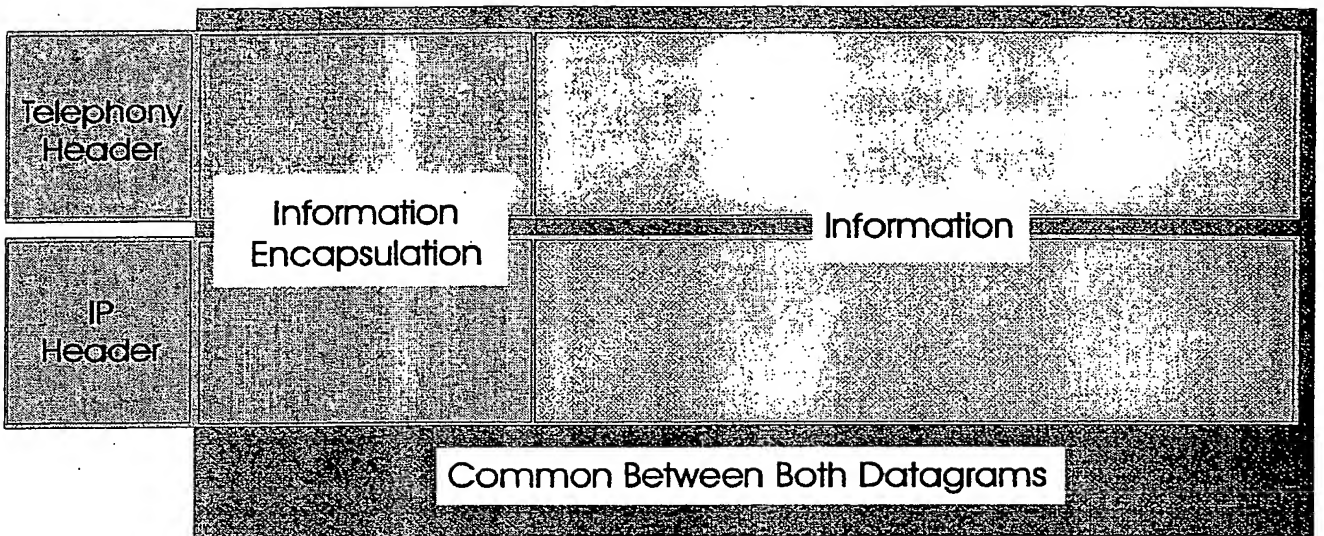
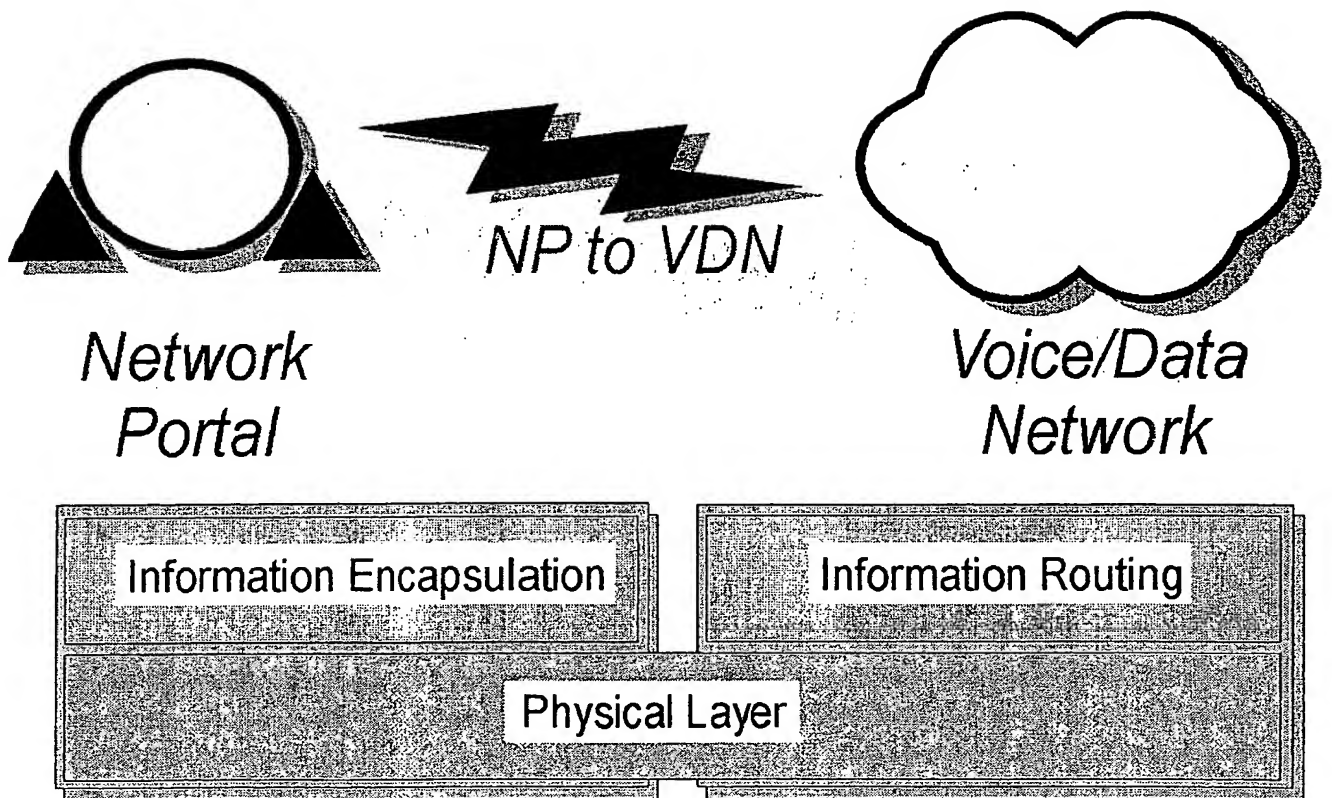
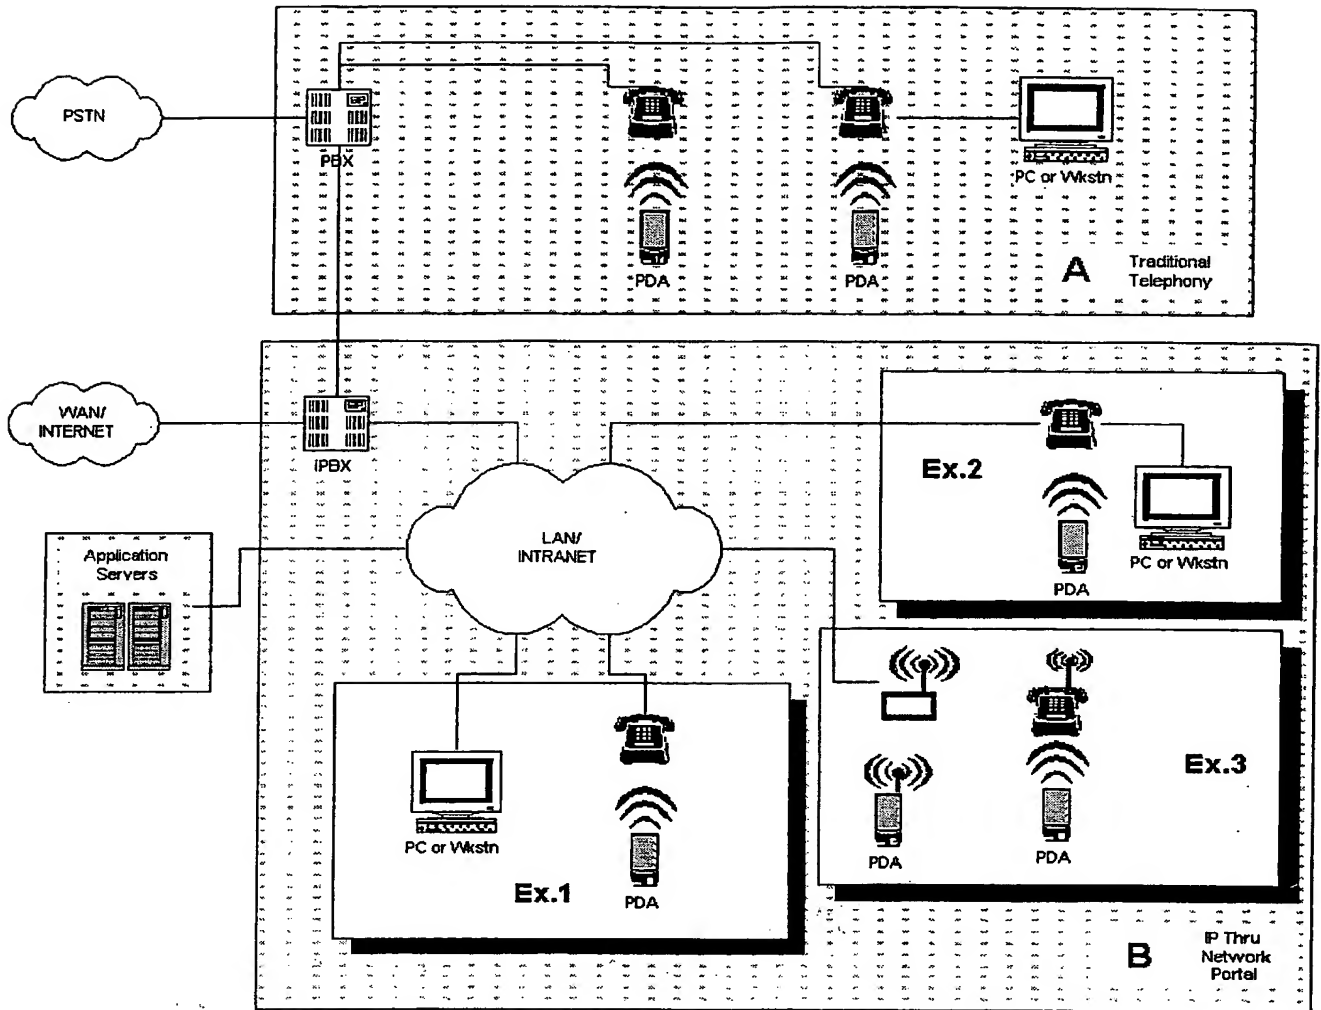


Figure 2

This Page Blank (uspto)

**Figure 3****Figure 4**

This Page Blank (uspto)

**Figure 5**

This Page Blank (uspto)

RECEIVED
MAR 19 2002
OIFE/JCWS